


es-Linum[®] standard

High-tech micro cable

estron

Ready-to-use
Cut, stripped, tinned

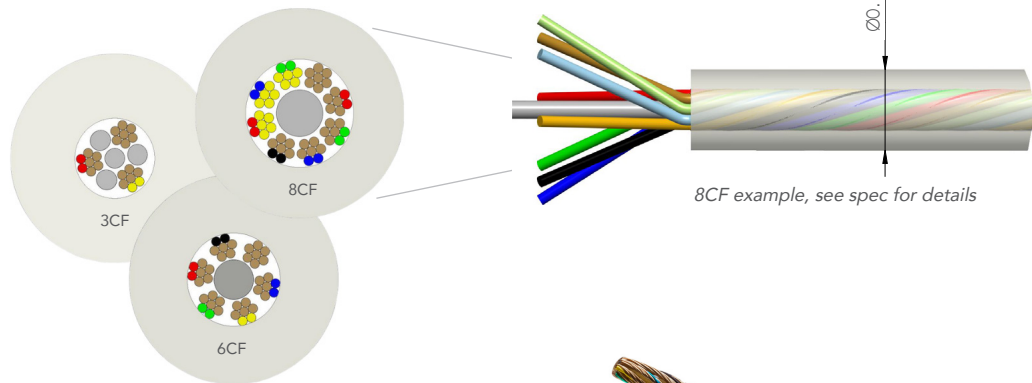

Specifications

Overall diameter:	Ø0.9mm ±0.03mm (Ø0.6mm available with 3 conductors)
Conductors:	ESW™ Litz wires 7x32µm - high purity copper (99.95%) wire with a fine silver plating. Polyurethane/polyamide, double enamel
Jacket:	UV stabilised Pebax - soft/hard versions
Stripping:	3mm (typical value)
Tinning:	0.5mm +0.5/- 0.0 (standard)
Solder:	SAC305 (Sn96.5 Ag3 Cu0.5), RoHS compliant
Soldering:	Maximum 0.5 seconds at 390°C

Availability

Cable type	Diameter [mm]	Pebax jacket colour	Shore D hardness ISO-868	Number of conductors	Medical grade jacket	Aramid fibres	Pull force [N]	Impedance [Ω/m]
2BF-7233 SP01 (Pending)	0.90	Transparent	69 (61 after 15s)	2	-	Yes	55	3.4
3CF-4533 SP01	0.90	Transparent	46 (41 after 15s)	3	-	Yes	55	3.4
3B-7233 SP01	0.90	Transparent	69 (61 after 15s)	3	-	-	17	3.3
3CF-7233 SP01	0.90	Transparent	69 (61 after 15s)	3	-	Yes	55	3.4
3CF-7233 SA01 MED/UV	0.90	Transparent	69 (61 after 15s)	3	Yes	Yes	55	3.4
3CF-7233 SP01	0.60	Transparent	69 (61 after 15s)	3	-	Yes	55	3.4
6CF-4533 SP01	0.90	Transparent/ Matt black	46 (41 after 15s)	6	-	Yes	60	3.6
6CF-7233 SP01	0.90	Transparent	69 (61 after 15s)	6	-	Yes	60	3.6
8CF-4533 SP01	0.90	Transparent/ Matt black	46 (41 after 15s)	8	-	Yes	90	3.5
8CF-7233 SA01 MED/UV (Pending)	0.90	Transparent	69 (61 after 15s)	8	Yes	Yes	90	3.5

Get spec for further details. Contact us at sales@estron.dk.

www.estron.dk